

Aquarea T-CAP All in One H Generation 1 Phase / 3 Phase • R410A

Aquarea, an innovative new low-energy system based on Air to Water heat pump technology

Aquarea warms your home effectively and efficiently, even with extreme outdoor temperatures. Aquarea can also cool space in summer and bring hot water all year round.

Aquarea T-CAP is the range for retrofit and new builds, Total Capacity even at extremely cold ambient.

Aquarea All in One: This range intelligently integrates the best Hydrokit technology with a premium quality stainless steel tank, which is maintenance-free.

- High energy Class A++
- Constant capacity down to -20°C
- Maximum hydraulic module output temperature: 60°C
- Stainless steel 185 L DHW tank
- U-Vacua™ insulation panel for higher tank efficiency
- Anode free water tank, no maintenance
- Works at temperatures as low as -28°C
- Special software for low consumption homes with minimum output temperature: 20°C
- Built-in magnet water filter and flow meter, and automatic air purge valve
- Easy installation and maintenance
- Cloud control and service with CZ-TAW1
- Easy-to- use remote controller




?

Air to water heat pump

Heating, cooling and domestic hot water systems for a green future.

[COMPARE SOLUTIONS](#)

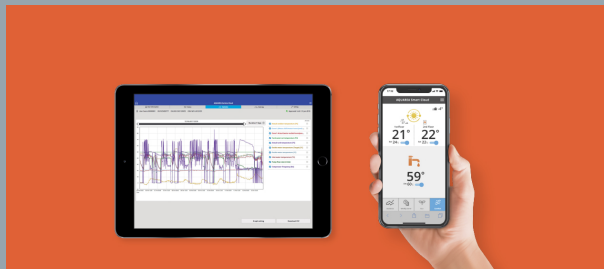

Aquarea Service Cloud. Control for today and for the future

[FOR END USER](#)

[FOR INSTALLERS / MAINTENANCE](#)



Heat Recovery Ventilation unit for a low-energy house

Ventilation systems with heat recovery offer users a high degree of living comfort thanks to temperature controlled and clean air.

[FIND OUT MORE](#)

Aquearea T-CAP All in One H Generation 1 Phase / 3 Phase • R410A		SINGLE PHASE (Power to indoor)		THREE PHASE (Power to indoor)		
		9 kW	12 kW	9 kW	12 kW	16 kW
Kit		KIT-AXC09HE5	KIT-AXC12HE5	KIT-AXC09HE8	KIT-AXC12HE8	KIT-AXC16HE8
Heating capacity (A +7°C, W 35°C)	kW	9,00	12,00	9,00	12,00	16,00
COP (A +7°C, W 35°C)		4,84	4,74	4,84	4,74	4,28
Heating capacity (A +7°C, W 55°C)	kW	9,00	12,00	9,00	12,00	16,00
COP (A +7°C, W 55°C)		2,94	2,88	2,94	2,88	2,71
Heating capacity (A +2°C, W 35°C)	kW	9,00	12,00	9,00	12,00	16,00
COP (A +2°C, W 35°C)		3,59	3,44	3,59	3,44	3,10
Heating capacity (A +2°C, W 55°C)	kW	9,00	12,00	9,00	12,00	16,00
COP (A +2°C, W 55°C)		2,21	2,19	2,21	2,19	2,13
Heating capacity (A -7°C, W 35°C)	kW	9,00	12,00	9,00	12,00	16,00
COP (A -7°C, W 35°C)		2,85	2,72	2,85	2,72	2,49
Heating capacity (A -7°C, W 55°C)	kW	9,00	12,00	9,00	12,00	16,00
COP (A -7°C, W 55°C)		2,02	1,92	2,02	1,92	1,86
Cooling capacity (A 35°C, W 7°C)	kW	7,00	10,00	7,00	10,00	12,20
EER (A 35°C, W 7°C)		3,17	2,81	3,17	2,81	2,57
Cooling capacity (A 35°C, W 18°C)	kW	7,00	10,00	7,00	10,00	12,20
EER (A 35°C, W 18°C)		5,19	5,13	5,19	5,13	3,49
Heating average climate. Seasonal energy efficiency η (W 35°C / W 55°C)	η s %	181 / 130	170 / 130	181 / 130	170 / 130	160 / 125
Heating average climate. Seasonal energy efficiency SCOP (W 35°C / W 55°C)	SCOP	4,60 / 3,33	4,33 / 3,33	4,60 / 3,33	4,33 / 3,33	4,08 / 3,20
Heating average climate. Energy class (W 35°C / W 55°C) (1)	A+++ to D	A+++ / A++	A++ / A++	A+++ / A++	A++ / A++	A++ / A++
Heating warm climate. Seasonal energy efficiency η (W 35°C / W 55°C)	η s %	235 / 158	231 / 158	235 / 158	231 / 158	231 / 159
Heating warm climate. Seasonal energy efficiency SCOP (W 35°C / W 55°C)	SCOP	5,95 / 4,03	5,85 / 4,03	5,95 / 4,03	5,85 / 4,03	5,85 / 4,05
Heating warm climate. Energy class (W 35°C / W 55°C) (1)	A+++ to D	A+++ / A+++	A+++ / A+++	A+++ / A+++	A+++ / A+++	A+++ / A+++
Heating cold climate. Seasonal energy efficiency η (W 35°C / W 55°C)	η s %	160 / 125	160 / 125	160 / 125	160 / 125	150 / 125
Heating cold climate. Seasonal energy efficiency SCOP (W 35°C / W 55°C)	SCOP	4,08 / 3,20	4,08 / 3,20	4,08 / 3,20	4,08 / 3,20	3,83 / 3,20
Heating cold climate. Energy class (W 35°C / W 55°C) (1)	A+++ to D	A++ / A++	A++ / A++	A++ / A++	A++ / A++	A++ / A++
Indoor unit		WH-ADC1216H6E5	WH-ADC1216H6E5	WH-ADC0916H9E8	WH-ADC0916H9E8	WH-ADC0916H9E8
Indoor sound pressure (Heat)	dB(A)	33	33	33	33	33
Indoor sound pressure (Cool)	dB(A)	33	33	33	33	33
Indoor dimension (Height)	mm	1800	1800	1800	1800	1800
Indoor dimension (Width)	mm	598	598	598	598	598
Indoor dimension (Depth)	mm	717	717	717	717	717
Indoor net weight	kg	124	124	126	126	126
Water pipe connector	Inch	R 1¼	R 1¼	R 1¼	R 1¼	R 1¼
A class pump (Number of speeds)		Variable Speed	Variable Speed	Variable Speed	Variable Speed	Variable Speed

Aquearea T-CAP All in One H Generation 1 Phase / 3 Phase • R410A		SINGLE PHASE (Power to indoor)		THREE PHASE (Power to indoor)		
		9 kW	12 kW	9 kW	12 kW	16 kW
A class pump (Input power Min)	W	36	36	36	36	36
A class pump (Input power Max)	W	152	152	152	152	152
Heating water flow ($\Delta T=5$ K, 35°C)	L/min	25,80	34,40	25,80	34,40	45,90
Capacity of integrated electric heater	kW	6,00	6,00	9,00	9,00	9,00
Indoor recommended fuse	A	30 / 30	30 / 30	16 / 16	16 / 16	16 / 16
Recommended minimum cable size, supply 1	mm²	3 x 4,0	3 x 4,0	5 x 1,5	5 x 1,5	5 x 1,5
Recommended minimum cable size, supply 2	mm²	3 x 4,0	3 x 4,0	5 x 1,5	5 x 1,5	5 x 1,5
Water volume	L	185	185	185	185	185
Maximum DHW temperature	°C	65	65	65	65	65
Material inside tank		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Tapping profile according EN16147		L	L	L	L	L
DHW tank ERP average climate efficiency rating (2)	A+ to F	A	A	A	A	A
DHW tank ERP warm climate efficiency rating (2)	A+ to F	A	A	A	A	A
DHW tank ERP cold climate efficiency rating (2)	A+ to F	A	A	A	A	B
DHW tank ERP average climate η	η_{wh} %	95	95	95	95	91
DHW tank ERP average climate SCOP		2,38	2,38	2,38	2,38	2,28
DHW tank ERP warm climate η	η_{wh} %	110	110	110	110	107
DHW tank ERP warm climate SCOP		2,75	2,75	2,75	2,75	2,68
DHW tank ERP cold climate η	η_{wh} %	75	75	75	75	72
DHW tank ERP cold climate SCOP		1,88	1,88	1,88	1,80	1,88
Outdoor unit		WH-UX09HE5	WH-UX12HE5	WH-UX09HE8	WH-UX12HE8	WH-UX16HE8
Outdoor sound power part load (Heat) (3)	dB(A)	66	66	65	65	67
Outdoor sound power full load (Heat)	dB(A)	68	69	68	69	72
Outdoor sound power full load (Cool)	dB(A)	67	68	67	68	71
Outdoor dimension (Height)	mm	1340	1340	1340	1340	1340
Outdoor dimension (Width)	mm	900	900	900	900	900
Outdoor dimension (Depth)	mm	320	320	320	320	320
Outdoor net weight	kg	101	101	108	108	118
Refrigerant (R410A) / CO2 Eq.	kg / T	2,85 / 5,951	2,85 / 5,951	2,85 / 5,951	2,85 / 5,951	2,90 / 6,055
Piping diameter (Liquid)	Inch (mm)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)
Piping diameter (Gas)	Inch (mm)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)
Pipe length range	m	3 ~ 30	3 ~ 30	3 ~ 30	3 ~ 30	3 ~ 30
Elevation difference (in/out)	m	20	20	20	20	20
Pre-charged pipe length	m	10	10	10	10	10
Additional gas amount	g/m	50	50	50	50	50
Operation range (Outdoor ambient)	°C	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35	-28 ~ +35
Water outlet (Heat)	°C	20 ~ 60	20 ~ 60	20 ~ 60	20 ~ 60	20 ~ 60
Water outlet (Cool)	°C	5 ~ 20	5 ~ 20	5 ~ 20	5 ~ 20	5 ~ 20

- (1) Scale from A+++ to D.
 - (2) Scale from A+ to F.
 - (3) Sound power in accordance to 8112013, 81312013 and EN12102-1:2017 at +7°C.
- EER and COP calculation is based in accordance to EN14511.

This product is designed to comply with the European Water Quality Directive 98/83/EC amended by 2015/1787/EU. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Complementary products

